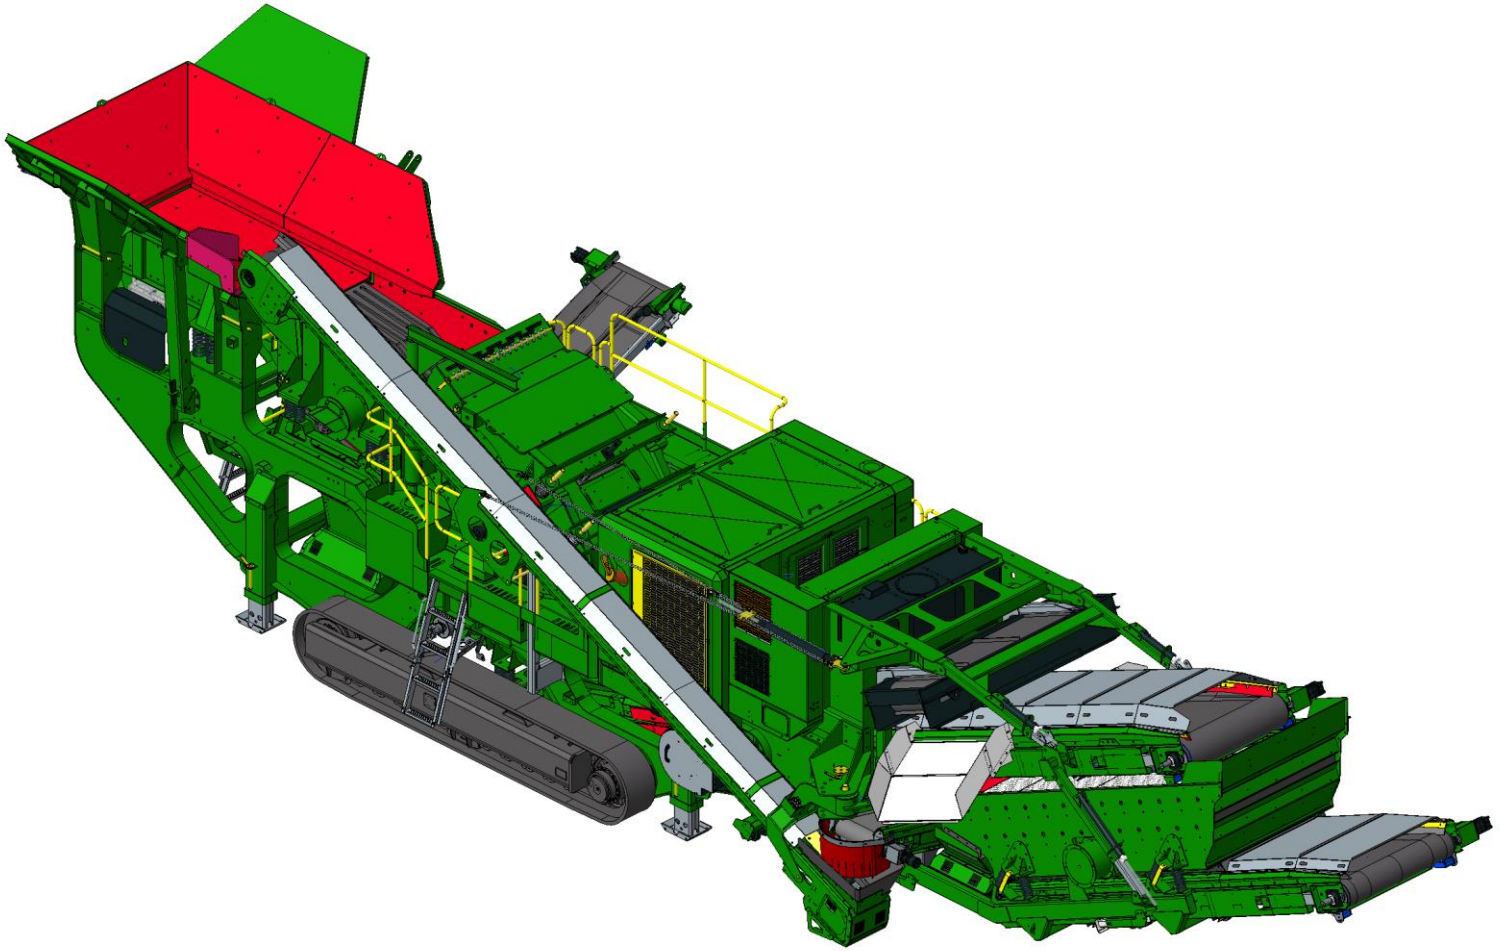



# ***SPECIFICATIONS***



# ***McCloskey*** ***I54Rv3***

**DESCRIPTION**

Heavy duty track mounted Crusher with following features:

- 1200mm (48") diameter x 1350mm (53") wide Impactor.
- 510Hp (380kW) Volvo D13 T4 Final engine.
- Tracked.
- Integrated hydraulic folding hopper.
- Integrated hydraulic folding stockpiling conveyors.
- I-beam plate fabricated chassis construction.
- Open chassis design for ease of maintenance
- Fast setup time
- Vibrating feeder under crusher discharge.

**DIMENSIONS AND WEIGHTS**

Length - transport model	19.081m (62' – 7.2")
Width - transport all models	3.75m (12' – 3.5")
Height - transport track	3.60m (11' – 9.7")
Weight – 1.5 Deck	64,990Kgs (143,267lbs) inc. magnet and dirt conveyor
Weight – 2 Deck	65,730Kgs (144,908lbs) inc. magnet and dirt conveyor

**CAPACITIES**


Diesel tank capacity	864 L (228 US gal)
Hydraulic tank capacity	783 L (207 US gal)
Clutch lube oil capacity	50 L (13.2 US Gals)

**IMPACTOR CHAMBER**

Feed opening WxH	1360 x 950mm, (53.5 x 37")
Impactor rotor	1200mm (47.2") diameter x 1335mm (52.6") wide
Crusher speed	530-640 rpm (33-40 m/sec rotor tip speed)
Number of aprons	2
Number of blowbars	4
Full blowbar weight	374 Kg (825 lbs)
Crusher Drive	Direct Drive
Feed size	600 x 500 x 500mm lump, (24" x 20" x 20")
Impactor weight	16,000kg (35,274 lbs)
Closed side setting adjustment	Hydraulic rams, shim system
Speed sensor	YES
Load sensor	Engine load monitoring

**PAN FEEDER**

Feeder width	1164mm (45.8")
Feeder length	2695mm (106.2")
Drive	Hydraulic
Motor	David Brown MCC 2208 58.7cc/rev
Flow rate	68.4 Lpm (18.1 US gpm)
Adjustable speed	Yes – via mechanical Flow Control
Variable speed	Yes – via electrical proportional pump
Maximum speed	970rpm

**DOUBLE DECK GRIZZLY PRE SCREEN**

Prescreen width (inside wearplates)	1204mm (47.4")
Prescreen length overall	2360mm (7' – 8.8")
Grizzly section opening	Tapered 35-75mm (1.4" – 3")
Grizzly section length	1180mm (46")
Bottom deck mesh	2017mm x 1608 (79.4" x 63.3")
Drive	Hydraulic
Motor	David Brown MCC 2208 58.7cc/rev
Flow rate	85.5Lpm (22.6 US gpm)
Adjustable speed	NO
Auto stop start system	YES
Maximum speed	1050rpm

**HOPPER**


Length overall	4280mm (14' – 0.5")
Width	2487mm (8' – 1.8")
Volume	6.8m <sup>3</sup> (8.9yd <sup>3</sup> )
Material	8mm sides + 10mm Hardox liners
Locking system	Hydraulic rear wedges and side hydraulic legs

**SIDE CONVEYOR**

Stockpile height	2569mm (8' – 5.1")
Belt width	800mm (32")
Belt spec	EP 400/3 3+1.5
Drive drum dia.	220mm (8.6")
Tail drum dia.	220mm (8.6") - spoked
Motor	OMT400
Flow rate	55.1 Lpm (14.6 US gpm)
Adjustable speed	YES
Maximum speed	109 rpm

**MAIN CONVEYOR**

Stockpile height	3743mm (12'–3") (without recirc screen)
Belt width	1400mm (55")
Belt spec	Plain 500/3 8+2
Drive drum dia.	330mm (13")
Tail drum dia.	287mm (11.3") – spoked
Motor	OMV800
Flow rate	106.4 Lpm (28.1 US gpm)
Maximum speed	133 rpm
Angle adjustable	OPTION
Quick release	YES

**PAN FEEDER UNDER IMPACTOR (OPTIONAL)**


Width (across base plate)	1264mm (49.8")
length	2370mm (93.3")
Base liners	10mm (3/8") stainless steel
Side liners	12mm (1/2" Hardox 400
Operating angle	8°
Vibrating motor	Twin out of balance mass
Hydraulic motor	2 off Eaton 32.9cc/rev
Fixed speed	YES
Flow rate	85.5 Lpm (22.6 US gpm)

**POWERUNIT AND HYDRAULICS**

Engine	Volvo D13 Tier 4 Final or Tier 3
Engine power	380 Kw (510 HP)
Engine speed	1600 - 1900 rpm
Impactor drive clutch	PTtech HPTO14TF1
Flywheel Pump 1 (Tracks/Feeder)	Kawasaki K3VL80
Flywheel Pump 2 (Tracks/Main conveyor)	Kawasaki K3VL80
LH PTO Pump 3 (Magnet/Side conv/pilot)	Turolla 29/23/07
Front PTO Pump 4 (Prescreen/Underpan)	Turolla 45/45
Total system flow (max)	457.9 Lpm (121 US Gpm)
Hydraulic tank capacity	783 L (207 US Gals)
Hydraulic tank ratio	1.7:1
Hydraulic Oil cooler	YES

**RECIRC SYSTEM - SCREENBOX**

Dimensions - top deck	4287mm x 1830mm (14' x 6')
Bearing type	NSK/RHP 22318
Screens - top deck	6' x 4' side tension - 3 off 6' x 2' side tension - 1 off
Screens - bottom deck	6' x 4' side tension - 3 off
Tensioning	Quick release pin and wedge
Screen angle	25 deg
Screen motor	DBH MCC2208 (58.7cc/rev)
Drive system	Direct drive with HRC150 coupling
Hydraulic flowrate	84.6 Lpm (22.5 US gpm)
Speed adjustable	YES - Pressure compensated FCV
Screen stroke adjustable	8 - 10mm
Screen shaft speed	950 rpm
Screen 'g' force	5.05

**RECIRC SYSTEM - RETURN CONVEYOR**

Belt width	650mm (26")
Belt spec	Chevron - 500/3 5+1.5 C15
Drive drum dia.	290mm (11.5")
Tail drum dia. (Spoked)	270mm (10.6")
Motor	OMT500
Flow rate	68.4 Lpm (18 US gpm)
Adjustable speed	YES
Maximum speed	135 rpm
Quick Release	YES
Radial to side for stockpiling	YES

**RECIRC SYSTEM - TRANSFER CONVEYOR OVERSIZE**


Belt width	600mm (23.6")
Belt spec	Plain 600/3 4+2
Drive drum dia.	178mm (7")
Tail drum dia.	187mm (7.36") Spoked
Motor	OMH500
Flow rate	68.4 Lpm (18 US gpm)
Adjustable speed	YES
Maximum speed	135 rpm

**RECIRC SYSTEM - FINES CONVEYOR**

Stockpile height	3085mm (10' – 1.4")
Belt width	1500mm (60")
Belt spec	Plain 500/3 8+2
Drive drum dia.	285mm (11.2")
Tail drum dia.	286mm (11.2") - spoked
Motor	OMV630
Flow rate	85.5 Lpm (22.5 US gpm)
Maximum speed	135 rpm

**RECIRC SYSTEM - TRANSFER CONVEYOR MID PRODUCT (2 deck only)**

Stockpile height	1821mm (5' – 11.7")
Belt width	600mm (23.6")
Belt spec	Plain 600/3 4+2
Drive drum dia.	178mm (7")
Tail drum dia.	187mm (7.36") Spoked
Motor	OMH 500
Flow rate	68.4 Lpm (18 US gpm)
Adjustable speed	YES
Maximum speed	135 rpm

**ELECTRICS**

Emergency stops	4 off, 2 feeder, 2 powerunit
Chassis cabling	Armored cable
Start Siren	YES – 10 sec delay
Control panel	Tedd Engineering / IFM
Engine shutdowns:	Low oil pressure High water temp Air filter blockage (selectable) Fuel contamination Low hydraulic tank level High hydraulic return line filter backpressure High hydraulic water filter backpressure High hydraulic oil temperature
Radio control tracks and feeder	STANDARD
Pendant track control	YES – plugged in control cabinet

**TRACKS**

Width	400mm (15.7")
Length	4050mm (13' – 5.4") crs
Height	840mm (33")
Gearbox	Bonfiglioli 711 (or equivalent)
Ratio	144:1
Motor	Rexroth A2FE90
Speed max	1.50 Kph (0.93 Mph)
Flow rate	152 Lpm (40.2 US gpm) Three speed system selectable at control panel with smooth start / stop.
Multiple speeds	
Attachment to chassis	Bolt On for quick change

**OPTIONS**

Main conveyor variable speed control	
Hopper Extensions	
Overband magnet	
Water Pump and dust suppression system	
Various blow bar material options	
Work lights	
Belt Scale	
Refueling pump	STANDARD



**SAFETY FEATURES**

- External belt alignment points
- External grease points
- Engine safety shutdown systems
- Full safety guarding for nip points

